




**3.7 Watt Floor Heating Cable System For Uncoupling Membrane**

Warm Cable floor heating system for uncoupling membrane combines the highest comfort levels with maximum energy efficiency. It's a proven technology that's safe, reliable and energy efficient.

- ➔ Easy Installation
- ➔ Emits Zero EMF
- ➔ 25 Year Limited warranty



**Specification**

Cable Construction	Twin Conductor
Rated Voltage	120V / 240V
Output	3.7W/ft (12.14W/m)
Heating Element Size	40' (12.2m) to 800' (243.8m)
Bending Radius	1" (25.4mm)
Cable Diameter	1/4"-1/6" (6mm)
Conductor Insulation	Fluoropolymer
Outer Insulation	Fluoropolymer ,TPE or Nylon
Max. Ambient Temp.	85°F (30°C)
Min. Installation Temp.	40°F (5°C)
Cold Lead Length	2 Wire 16 AWG Plus Ground Braid 10 ft (3m)

120 Volts								
Model	ohms	watt	amp	Length		Covers SqFt Spacing		
				Ft	M	3,5"	3,75"	
3,7CWC - 120V - 05	240	60	0.5	16.5	5.05	4.8		5.2
3,7CWC - 120V - 10	120	120	1	33	10.1	9.6		10.3
3,7CWC - 120V - 14	80	180	1.5	49.5	15.1	14.4		15.5
3,7CWC - 120V - 19	60	240	2	66	20.1	19.3		20.6
3,7CWC - 120V - 24	48	300	2.5	82.5	25.1	24.1		25.8
3,7CWC - 120V - 29	40	360	3	99	30.2	28.9		30.9
3,7CWC - 120V - 34	32.3	420	3.5	115.5	35.2	33.7		36.1
3,7CWC - 120V - 38	30	480	4	132	40.2	38.5		41.3
3,7CWC - 120V - 43	26.7	540	4.5	148.5	45.3	43.3		46.4
3,7CWC - 120V - 48	24	600	5	165	50.3	48.1		51.6
3,7CWC - 120V - 58	20	720	6	198	60.4	57.8		61.9
3,7CWC - 120V - 67	17.1	840	7	231	70.4	67.4		72.2
3,7CWC - 120V - 77	15	960	8	264	80.5	77		82.5
3,7CWC - 120V - 87	13.3	1080	9	297	90.5	86.6		92.8
3,7CWC - 120V - 96	12	1200	10	330	100.6	96.3		103.1
3,7CWC - 120V - 106	10.9	1320	11	363	110.6	105.9		113.4
3,7CWC - 120V - 115	10	1440	12	396	120.7	115.5		123.8
3,7CWC - 120V - 125	9.2	1560	13	429	130.8	125.1		134.1
3,7CWC - 120V - 135	8.6	1680	14	462	140.8	134.8		144.4
3,7CWC - 120V - 144	8	1800	15	495	150.9	144.4		154.7

3.7 Watt Floor Heating Cable System For Uncoupling Membrane






# WF-3.7CWC

## 3.7 Watt Floor Heating Cable System For Uncoupling Membrane

- ➔ Easy Installation
- ➔ Emits Zero EMF
- ➔ 25 Year Limited warranty

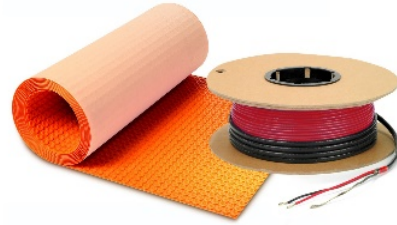


3.7 Watt Floor Heating Cable System For Uncoupling Membrane




240 Volts								
Model	ohms	watt	amp	Length		Covers SqFt		Spacing
				Ft	M	3,5"	3,75"	
3,7CWC - 240V - 10	480	120	0.5	33	10.1	9.6		10.3
3,7CWC - 240V - 14	320	180	0.8	49.5	15.1	14.4		15.5
3,7CWC - 240V - 19	240	240	1	66	20.1	19.3		20.6
3,7CWC - 240V - 24	192	300	1.3	82.5	25.1	24.1		25.8
3,7CWC - 240V - 29	160	360	1.5	99	30.2	28.9		30.9
3,7CWC - 240V - 34	137.1	420	1.8	115.5	35.2	33.7		36.1
3,7CWC - 240V - 38	120	480	2	132	40.2	38.5		41.3
3,7CWC - 240V - 43	106.7	540	2.3	148.5	45.3	43.3		46.4
3,7CWC - 240V - 48	96	600	2.5	165	50.2	48.1		51.6
3,7CWC - 240V - 58	80	720	3	198	60.4	57.8		61.9
3,7CWC - 240V - 67	68.6	840	3.5	231	70.4	67.4		72.2
3,7CWC - 240V - 77	60	960	4	264	80.4	77		82.5
3,7CWC - 240V - 87	53.3	1080	4.5	297	90.6	86.6		92.8
3,7CWC - 240V - 96	48	1200	5	330	100.6	96.3		103.1
3,7CWC - 240V - 115	40	1440	6	396	120.8	115.5		123.8
3,7CWC - 240V - 135	34.3	1680	7	462	140.8	134.8		144.4
3,7CWC - 240V - 154	30	1920	8	528	161	154		165
3,7CWC - 240V - 173	26.7	2160	9	594	181	173.3		185.6
3,7CWC - 240V - 192	24	2400	10	660	201.2	192.5		206.3
3,7CWC - 240V - 212	21.8	2640	11	726	221.2	211.8		226.9
3,7CWC - 240V - 231	20	2880	12	792	241.4	231		247.5
3,7CWC - 240V - 250	18.5	3120	13	858	261.6	250.3		268.1
3,7CWC - 240V - 270	17.1	3360	14	924	281.6	269.5		288.8
3,7CWC - 240V - 289	16	3600	15	990	301.8	288.8		309.4




## 3.7 Watt Cable Structure For Uncoupling Membrane

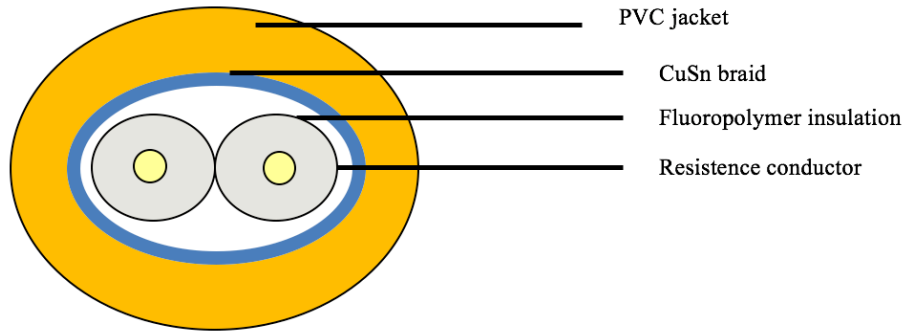

Cable diameter 4.9 mm  
 120 Volts from 05 Sq.Ft. to 106 Sq.Ft.  
 240 Volts 10 Sq.Ft. to 212 Sq.Ft.

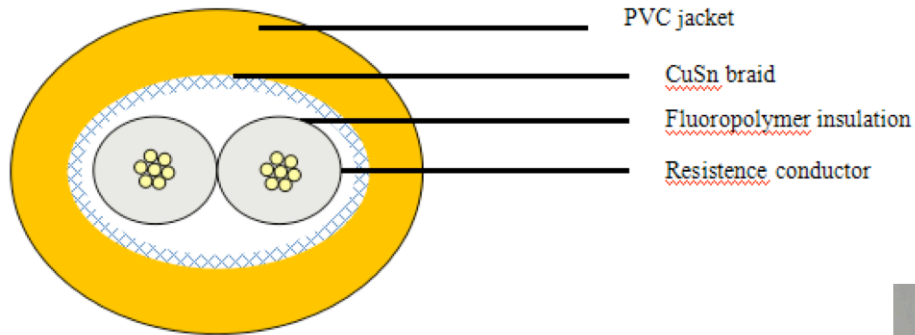

Cable diameter 4.9 mm  
 120 Volts from 115 Sq.Ft. to 144 Sq.Ft.  
 240 Volts 231 Sq.Ft. to 289 Sq.Ft.

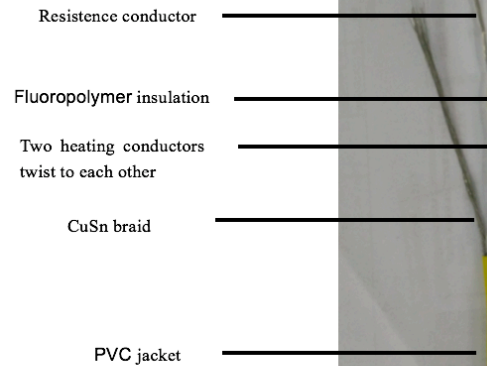

3.7 Watt Cable Structure For Uncoupling Membrane

